


Typical Section: Light Duty Public Street

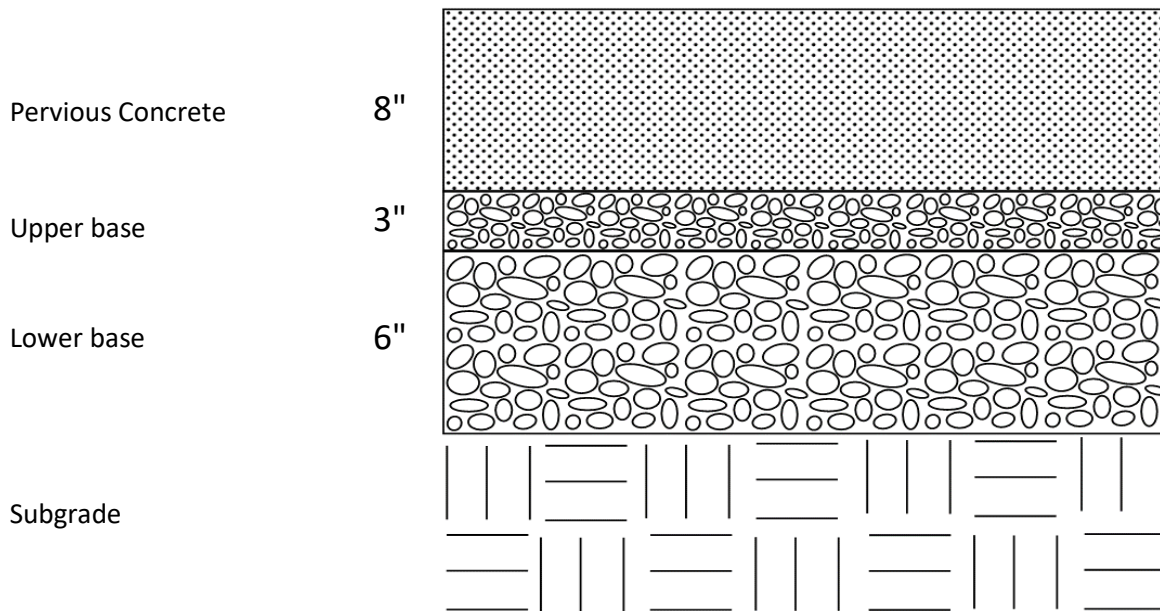

Upper Base: 3/4" crushed drain rock/ ASTM #57 stone/ Caltrans Class I type B permeable

Lower Base: ASTM # 2 aggregate

All base aggregate shall be crushed and clean

Shall be flat for maximum performance

Section thickness may be adjusted based on Geotech report

Subgrade:

Shall be flat for maximum performance

If overcompacted from heavy equipment traffic, scarify and recompact top 6"

88- 92% compaction. Over compaction reduces soil infiltration capacity

Geotextile fabric over high plasticity soils and or slopes greater than 8%

**For pavements receiving runoff from adjacent areas please consult BAPC.